

13.11	Sedimentation and Rheology Tests	175
13.12	Additional Metallurgical Tests on Samples of Four Zones of the Oculito Deposit	177
13.13	Environmental Testing.....	178
13.14	Additional Tests Conducted by AbraSilver	184
13.15	Metals Recovery	185
13.16	Conclusions and Recommendations.....	186
14	MINERAL RESOURCE ESTIMATES.....	189
14.1	Summary.....	189
14.2	Drill Data	192
14.3	Geological Model.....	196
14.4	Exploratory Data Analysis	198
14.5	Treatment of Missing / Absent Samples	201
14.6	Compositing.....	201
14.7	Top Cutting.....	207
14.8	Bulk Density Determination.....	210
14.9	Variography	212
14.10	Block Model.....	223
14.11	Model Construction and Parameters.....	223
14.12	Grade Estimation	223
14.13	Estimation Methods	223
14.14	Metal Risk Review	225
14.15	Parent Cell size sensitivity.....	225
14.16	Model Validation	225
14.16.1	Visual Inspection.....	225
14.16.2	Trend plots validation	230
14.17	Mineral Resource Classification and Criteria.....	230
14.18	Mineral Resource Statement	233
14.19	Reasonable Prospects for Eventual Economic Extraction Requirement	236
14.20	Mineral Resource Estimate Sensitivity	237
14.21	Comparison with previous Oculito Estimate.....	239
14.22	Mineral Resource Risk Assessment	240
15	MINERAL RESERVE ESTIMATES.....	241
15.1	Introduction	241
15.2	Mine Design Input Parameters	242
15.2.1	Metal Prices.....	242
15.2.2	Mineral Resource Model.....	244
15.2.3	Topography.....	246
15.2.4	Geotechnical Pit Slope Assessment and Design Guidance.....	248
15.2.5	Mineral Processing Methods	251
15.2.6	Operating Cost Used for Block Value.....	251

15.2.7	Mining Dilution.....	252
15.2.8	Ore Loss.....	253
15.2.9	Gold and Silver Recovery.....	253
15.2.10	Block Valuation and Cut-off Grade	253
15.3	Open Pit Optimization.....	255
15.3.1	Optimization Results.....	255
15.4	Mineral Reserve Pit Design	263
15.4.1	Parameters Relevant to Mine Design	263
15.4.1.1	Selective Mining Unit Size.....	263
15.4.1.2	Geotechnical Pit Wall Design	263
15.4.1.3	Haul Road Design.....	263
15.4.2	Mineral Reserve Pit Design.....	264
15.5	Mining Reserve Estimate.....	266
15.5.1	Strategic Mine Planning	266
15.5.2	Selection of Theoretical Phases	266
15.6	Mineral Reserve Statement	273
15.7	Factors Affecting Mineral Reserve Estimates.....	275
15.8	Comments on Section 15 from the QP	275
16	MINING METHODS.....	276
16.1	Introduction	276
16.2	Mine Design Criteria.....	276
16.2.1	Final Open Pit Design.....	278
16.2.2	Operating Phase Design	281
16.3	Mining Plan	284
16.3.1	Pre-Production Activities.....	284
16.3.2	Mine Plan.....	287
16.3.3	Pit Design by Phases	291
16.3.4	Mine Access.....	298
16.4	Waste Dumps.....	298
16.4.1	East Main Dump	299
16.4.2	North Secondary Waste Dump	301
16.5	Stocks.....	303
16.5.1	Rom Pad Stock	303
16.5.2	Marginal Stock	303
16.6	Fleet Estimation.....	305
16.6.1	Loading.....	307
16.6.2	Haulage (Ore & Waste)	307
16.6.3	Drilling	309

16.6.4	Support Services.....	311
16.7	Mine Personnel.....	312
16.8	General Mine Layout	314
16.9	Stability Open Pit Analysis	315
16.9.1	Geotechnical Characterization.....	315
16.9.1.1	Geotechnical Units.....	315
16.9.2	Final Open Pit Stability	319
16.9.3	Diablillos Stability by Mining Phases.....	322
16.9.3.1	Phase 1	322
16.9.3.2	Phase 2	324
16.9.3.3	Phase 3	327
16.9.3.4	Phase 4	328
16.9.3.5	Phase 5	329
16.9.3.6	Phase 6	331
16.9.4	Summary of Results	332
16.9.5	General Recommendations on Geotechnical Analysis	332
16.9.6	Design Recommendations.....	333
16.10	Water Management.....	343
16.11	QP Comments about Section 16	344
17	RECOVERY METHODS.....	345
17.1	General Description.....	345
17.2	Process Design Criteria	347
17.3	Process Description	350
17.3.1	Crushing Circuit	350
17.3.2	Grinding Circuit	351
17.3.3	Gravity Concentration and Intensive Cyanidation Circuit	352
17.3.4	Cyanide Leach Circuit.....	352
17.3.5	Counter Current Decantation Circuit.....	353
17.3.6	Merrill Crowe Circuit.....	354
17.3.7	Foundry Circuit	356
17.3.8	Tailings Detoxification and Handling	356
17.3.9	Reagents.....	357
17.3.9.1	Pebble Lime and Milk of Lime	357
17.3.9.2	Sodium Cyanide.....	358
17.3.9.3	Sodium Hydroxide.....	358
17.3.9.4	Diatomaceous Earth.....	359
17.3.9.5	Zinc Dust	360

17.3.9.6	Flocculant.....	360
17.3.9.7	Fluxes.....	361
17.3.9.8	Sodium Metabisulfite.....	361
17.3.9.9	Copper Sulphate	362
17.3.9.10	Lead Nitrate.....	362
17.3.9.11	Antiscalant.....	362
17.4	Process Solution and Raw Water.....	362
17.5	Process Air and Instrument Air	363
17.6	Power	363
18	PROJECT INFRASTRUCTURE	365
18.1	Summary	365
18.2	Diablillos General Site Plan	366
18.3	Access Roads, Main Site Access, and Internal Roads.....	367
18.3.1.	From Salta City	367
18.3.2.	From Jujuy City	367
18.3.3.	From Catamarca City.....	367
18.4	Raw Water Supply	370
18.4.1	Water Source- Piezometer / Wells	371
18.4.2	Raw Water and Fire Water Distribution	374
18.4.3	Potable Water System	375
18.4.4	Sewage Treatment System.....	375
18.5	Power Supply	378
18.5.1	Electrical Load	378
18.5.2	Power Generation	378
18.5.3	Power Distribution.....	380
18.6	Waste Dumps.....	381
18.7	Tailings Storage Facility (TSF).....	384
18.7.1	Tailings and Disposal.....	386
18.7.2	Water Proofing System	388
18.7.3	Tailings System, Water Recovery & Drainage Water Collection.....	393
18.7.3.1	Tailings Discharge System.....	393
18.7.3.2	Drainage Water Collection System	395
18.8	Topsoil and Overburden Stockpiles	396
18.9	Steel Buildings.....	396
18.9.1	Camp Maintenance Warehouse & Workshop.....	396
18.9.2	Waste management building.....	397
18.9.3	Drilling core box storage building.....	397
18.9.4	Truck Shop	397

18.9.5	Plant & Mine Warehouse	399
18.10	Modular buildings - Construction and Operations Camp, Service Hub.....	400
18.10.1	Camp General Arrangement.....	400
18.10.2	Modular Buildings.....	400
18.10.3	Dormitories	401
18.10.4	Kitchen and Canteen.....	402
18.10.5	First Aid and Medical Emergency Station.....	403
18.10.6	Laundry.....	404
18.10.7	Administration Offices, Access Control, & Access Barriers	405
18.10.8	Service Hub, Plant & Mine Operations Offices	407
18.10.9	Laboratories.....	407
18.10.10	Service Hub, plant access control and change room.	408
18.10.11	Powder magazine	409
18.11	Site Services	410
18.11.1	Diesel Storage.....	410
18.11.2	Site Wide Communications.....	410
18.11.3	Site Fencing.....	411
18.12	Utilities Network and Water Distribution	411
18.12.1	Firefighting Water Distribution Network	411
18.12.2	Kitchen Grease Separation Chamber	411
18.12.3	Gas Distribution Network	412
19	MARKET STUDIES AND CONTRACTS.....	414
19.1	Final Product Transport/Logistics	414
19.2	Royalties.....	416
19.3	Contracts.....	416
20	ENVIRONMENTAL STUDIES, PERMITTING AND SOCIAL OR COMMUNITY IMPACT	417
20.1	Regulations and Permitting.....	417
20.1.1	Environment Requirements.....	417
20.1.2	Environmental Obligations	418
20.1.3	Other Obligations	418
20.1.4	Permitting.....	419
20.1.4.1	Sector Permits	419
20.1.4.2	Permitting Agencies	419
20.1.4.3	Permits	421
20.1.4.4	Preparation of EIR Reports in Line with Local Legislation	425
20.2	Environmental Baseline.....	427
20.2.1	Location and Access Routes.....	427

20.2.2	Climatology	432
20.2.3	Air Quality	432
20.2.4	Water Quality	432
20.2.4.1	Hydrochemistry of the St.DBLAg4 Well.....	433
20.2.4.2	Hydrochemistry of the St.DBLAg1 & St.DBLAg5.....	434
20.2.5	Hydrology	437
20.2.6	Hydrogeology.....	437
20.2.7	Soil Science	438
20.2.8	Flora and Fauna.....	438
20.2.8.1	Flora	438
20.2.8.2	Fauna.....	442
20.2.9	Ecosystem Characterization	443
20.2.10	Local Ecosystem Characterization	443
20.2.11	Identification of Protected Area.....	443
20.2.12	Archaeology	444
20.2.13	Environmental Risks.....	445
20.2.13.1	Risk Assessment.....	445
20.2.13.2	Risk Register	445
20.2.13.3	Operations.....	445
20.2.13.4	Dump or Sterile Rock Deposit.....	445
20.2.13.5	Water	446
20.2.13.6	Air Quality.....	446
20.2.13.7	Soil	446
20.2.13.8	Flora and Fauna.....	446
20.2.13.9	Sites of Archaeological Interest	447
20.2.13.10	Noise.....	447
20.2.13.11	Closure and Post Closure Phase.....	447
20.2.14	Environmental Management Plan (EMP)	447
20.2.14.1	Measuring Conditions.....	448
20.2.15	Issues of Environmental Concern	451
20.2.16	Operations and Management.....	452
20.3	Community Relations.....	452
20.3.1	Social-Economic and Cultural Aspects	452
20.3.2	Stakeholder Engagement	455
20.3.3	Community Development	459
20.3.3.1	Context Assessment.....	459
20.3.3.2	Definition of the Vision and Goals	459

20.3.3.3	Development of the Strategies and Actions	459
20.3.3.4	Allocation of the Resources and Responsibilities	459
20.3.3.5	Monitoring and Evaluation of the Progress and Impact of the Community Plan ...	460
20.3.3.6	Communication and Reporting the Outcomes and Achievements of the Community Plan	460
20.4	Closure	460
20.5	Corporate Social Responsibility	461
21	CAPITAL AND OPERATING COSTS	463
21.1	Introduction	463
21.2	Capital Costs (CAPEX)	463
21.2.1	Material Take-Off's	463
21.2.2	Labor – Site conditions	463
21.2.3	Site conditions – Hospitality - Transportation	464
21.2.4	Mine fleet	465
21.2.5	Other data sources	466
21.2.6	Other cost considerations for main CAPEX areas	468
21.2.6.1	Pre-Production Stripping	468
21.2.6.2	Mine Infrastructure Capital	469
21.2.6.3	Process Plant and Ancillary Systems	469
21.2.6.4	Site-wide piping	470
21.2.6.5	Site-wide electrical	470
21.2.6.6	Site-wide I&C	470
21.2.6.7	TSF – Tailings -Storage Facility	470
21.2.6.8	Off-site infrastructure	470
21.2.6.9	Construction support and site costs supplied by the owner.	470
21.2.6.10	Engineering and Construction Management support	471
21.2.6.11	Owner's costs	471
21.2.6.12	Contingency	472
21.2.7	Sustaining Capital Cost	472
21.2.8	Mine remediation and closure	472
21.2.9	Assumptions, Restrictions and Exclusions	472
21.3	Operating Costs (OPEX)	473
21.3.1	Basis of Estimate	473
21.3.2	Operating costs details	474
21.3.2.1	Operations staff	475
21.3.2.2	Camp Operating Costs	475
21.4	Mine Operating Costs	476

21.4.1.1	Plant Operating Costs.....	477
21.4.1.2	Ancillaries, Utilities and Off-site Operating Costs	478
21.4.1.3	Maintenance Operating Costs.....	478
21.4.1.4	Logistics Costs.....	479
21.4.1.5	General and Administration Costs.....	480
22	ECONOMIC ANALYSIS.....	481
22.1	Introduction	481
22.2	Forward-Looking Information Cautionary Statements.....	481
22.3	Methodologies Used	482
22.4	Financial Model Parameters	482
22.5	Assumptions	483
22.6	Taxes	484
22.7	Royalties.....	485
22.8	Depreciation	485
22.9	Economic Analysis	486
22.10	Sensitivity Analysis	490
23	ADJACENT PROPERTIES.....	492
23.1	Metallic Projects.....	492
23.1.1	Condor Yacu.....	492
23.1.2	Rumi Cori	493
23.1.3	Incahuasi.....	493
23.1.4	Inca Viejo.....	493
23.1.5	Pistola de Oro.....	494
23.1.6	Vicuña Muerta.....	495
23.2	Lithium and non-metallic Projects.....	495
23.2.1	Fenix.....	495
23.2.2	Kachi.....	495
23.2.3	Sal de Vida	495
23.2.4	Sal de Oro	496
23.2.5	Sal de los Angeles	496
23.2.6	Centenario – Ratones.....	496
23.2.7	Tincalayu.....	496
23.2.8	Pozuelos – Pastos Grandes.....	496
23.2.9	Salar de Pastos Grandes.....	497
24	OTHER RELEVANT DATA AND INFORMATION	498
24.1	Project Execution Schedule.....	498
24.2	Execution strategy	498
24.2.1	Project Type	498

24.2.2	Logistics and Sequencing.....	499
24.3	Key milestones.....	499
24.3.1	Summary.....	499
24.4	Permitting	500
24.5	Critical path.....	500
24.5.1	Schedule Contingency and Risk.....	500
24.6	Project Risk Review	500
25	INTERPRETATION AND CONCLUSIONS.....	502
26	RECOMMENDATIONS.....	506
	REFERENCES.....	509
	APPENDIX.....	512

FIGURES INDEX

Figure 1-1: Proposed project facilities general overview.....	19
Figure 1-2: Recovered Silver equiv. ounces versus Average Annual Silver equiv. grades (g/t).....	25
.....	25
Figure 1-3: LOM Prod. After-Tax Cash Flow versus Cum. After-Tax Cash-Flow.....	25
.....	25
Figure 1-4: Post-Tax NPV5 Sensitivity Analysis Results.....	26
Figure 4-1: Property location. Source: Abrasilver Resource Corp. 2023.	66
Figure 4-2: Detailed property location. Source: Abrasilver Resource Corp. 2023.	67
Figure 4-3: Salta Property Claims. Source: AbraSilver Resource Corp. 2023.....	68
Figure 4-4: Catamarca Property Claims. Source: AbraSilver Resource Corp. 2023.	69
Figure 4-5: Total Property Claims, Salta & Catamarca provinces. Source: AbraSilver Resource Corp. 2023.	70
Figure 5-1: Accessibility to the property. Source: Abrasilver Resource Corp. 2023.	72
Figure 7-1: Regional geology, including faults. Source: Abrasilver Resource Corp., 2022.	82
Figure 7-2: Simplified geology of Diablillos Project. Source: Modified by AbraSilver, based on Grosse y Guzmán (2017) and on geology maps from SEGEMAR and Schnurr et al. (2006).	85
Figure 7-3: Main geologic aspect and lineaments of Diablillos Project. Source: Internal mapping from AbraSilver Resource Corp., 2023.	88
Figure 7-4: Main structural aspects and lineaments of Diablillos Project. Source: Internal mapping from Abrasilver Resource Corp., 2023.	90
Figure 7-5: Diablillos Project mineral occurrences. Source: Internal mapping from Abrasilver Resource Corp., 2022.	92
Figure 7-6: Oculito geology map. Source: updated from Ristorcelli and Ronning, 2001, with internal mapping from AbraSilver Resource Corp. 2023.....	95
Figure 7-7: Oculito geology map. Source: Ristorcelli and Ronning, 2001	96
Figure 7-8: Oculito conceptual mineralization model. Source: Abrasilver Resource Corp., David O'Connor, 2019.	97
Figure 7-9: Alteration at Oculito. Source: modified from Ristorcelli and Ronning, 2001 with internal mapping of AbraSilver Resource Corp., 2022.	98
Figure 8-1: schematic model of high sulphidation deposits and its hydrothermal alterations. Gold deposits, USGS, 2012.	100
Figure 9-1: Exploration target areas at Diablillos Project. Source: AbraSilver Resource corp., 2022.	104
Figure 9-2: Near term exploration targets at Diablillos Project. AbraSilver Resource Corp., 2022.	105
Figure 10-1: Summary of drilling campaign per year at Diablillos Project, AbraSilver Resource Corp., 2023.	108
Figure 10-2: Diablillos drill hole locations by company. Source: AbraSilver Resource Corp., 2023.	110

Figure 10-3: Oculito drill hole locations, coloured by type. Source: AbraSilver Resource Corp., 2022.	111
Figure 11-1: Internal reference material, blank, gold performance.....	124
Figure 11-2: Internal reference material, blank, silver performance.	125
Figure 11-3: Certified reference material STRT-04, gold performance.	126
Figure 11-4: Certified reference material STRT-04, silver performance.....	126
Figure 11-5 Certified reference material PM 1122, gold performance.	127
Figure 11-6: Certified reference material PM 1122, silver performance.....	127
Figure 11-7: RMA Scattergram for duplicate performance of gold.....	128
Figure 11-8: RMA Scattergram for duplicate performance of silver.	128
Figure 11-9: Internal reference material, blank, gold performance.....	130
Figure 11-10: Internal reference material, blank, silver performance.	131
Figure 11-11: Certified reference material STRT-04, gold performance.....	132
Figure 11-12: Certified reference material STRT-04, silver performance.	132
Figure 11-13: Internal reference material H01, gold performance.....	133
Figure 11-14: Internal reference material H01, silver performance.	133
Figure 11-15: Internal reference material M01, gold performance.....	134
Figure 11-16: Internal reference material M01, silver performance.	134
Figure 11-17: Internal reference material L01, gold performance.	135
Figure 11-18: Internal reference material L01, silver performance.	135
Figure 11-19: RMA Scattergram for duplicate performance of gold.....	136
Figure 11-20: RMA Scattergram for duplicate performance of silver.	136
Figure 11-21: Internal reference material, blank, gold performance.....	139
Figure 11-22: Internal reference material, blank, silver performance.	139
Figure 11-23: Certified reference material STRT-04, gold performance.....	141
Figure 11-24: Certified reference material STRT-04, silver performance.	141
Figure 11-25: Certified Reference Material AuOx-41, gold performance.....	142
Figure 11-26: Certified Reference Material AuOx-41, silver performance.	142
Figure 11-27: Certified Reference Material PLSUL59, gold performance.....	143
Figure 11-28: Certified Reference Material PLSUL59, silver performance.	143
Figure 11-29: Certified Reference Material AuOx-18, gold performance.....	144
Figure 11-30: Certified Reference Material AuOx-18, silver performance.	144
Figure 11-31: Certified Reference Material AuOx-33, gold performance.....	145
Figure 11-32: Certified Reference Material AuOx-33, silver performance.	145
Figure 11-33: Internal Reference Material ASDBL_H01, gold performance.	146
Figure 11-34: Internal Reference Material ASDBL_H01, silver performance.....	146
Figure 11-35: Internal Reference Material ASDBL_M01, gold performance.....	147

Figure 11-36: Internal Reference Material ASDBL_M01, silver performance.	147
Figure 11-37: Internal Reference Material ASDBL_L01, gold performance.	148
Figure 11-38: Internal Reference Material ASDBL_L01, silver performance.....	148
Figure 11-39: RMA Scattergram for duplicate performance of gold.....	149
Figure 11-40: RMA Scattergram for duplicate performance of silver.	150
Figure 11-41: Min-Max vs Hyperbolic Method Scattergram for duplicate performance of gold.....	150
Figure 11-42: Min-Max vs Hyperbolic Method Scattergram for duplicate performance of silver.	150
Figure 12-1: Drill core storage facility at site. Source: Abrasilver 2023.	158
Figure 14-1: Plan view of the location of drill holes used in the estimation of resources coloured by drill type.	194
Figure 14-2: Plan view of drill hole collars used in the estimation of resources coloured by Company.	195
Figure 14-3: Vertical cross section N-S 720025, showing the lithology domains with superimposed alteration domains.	197
Figure 14-4: Vertical cross section N-S 720325, showing the lithology domains with superimposed alteration domains.	198
Figure 14-5: Non-composited Sample Data - Samples length. Oculito and Laderas zones.	203
Figure 14-6: 2 m Composite Data - Sample intervals. Oculito and Laderas zones.....	203
Figure 14-7: Non-composited Sample Data - Samples length. JAC zone.	204
Figure 14-8: 2 m Composite Data - Sample intervals. JAC zone.	204
Figure 14-9: Non-composited Sample Data - Samples length. Fantasma zone.....	205
Figure 14-10: 2 m Composite Data - Sample intervals. Fantasma zone.	205
Figure 14-11: Example of the top cut analysis – Gold domain 232.....	208
Figure 14-12: Example of the top cut analysis – Silver domain 412.....	209
Figure 14-13: Example of the top cut analysis – Silver domain 512.....	209
Figure 14-14: Example of the top cut analysis – Silver domain 612.....	210
Figure 14-15: Gold domain 232 – Variogram Map.....	215
Figure 14-16: Silver 232 –Variogram Map.....	216
Figure 14-17: Silver 512 –Variogram Map.....	217
Figure 14-18: Silver 612 –Variogram Map.....	217
Figure 14-19: Gold domain 232 – Traditional Variogram Model for Gold.....	218
Figure 14-20: Silver domain 232 – Correlogram Variogram Model for silver.....	219
Figure 14-21: Silver domain 512 – Normal Score Variogram Model for silver.....	220
Figure 14-22: Silver domain 612 – Normal Score Variogram Model for silver.....	220
Figure 14-23: Gold domain 232 – 3D view of Traditional Variogram Model for gold.....	221
Figure 14-24: Silver domain 232 – 3D view of Correlogram Variogram Model for silver.....	221
Figure 14-25: Silver domain 512 – 3D view of Normal Score search ellipse model for silver.....	222
Figure 14-26: Silver domain 611 – 3D view of Normal Score search ellipse model for silver.....	222

Figure 14-27: Section 720300- E with Block model 10 mE x 10 mN x 10 mRL and composite for gold.	226
Figure 14-28: Section 720300- E with Block model 10 mE x 10 mN x 10 mRL and composite for silver.	227
Figure 14-29: Section 719350-E with Block model 10 mE x 10 mN x 10 mRL and composite for silver.	228
Figure 14-30: Section 719650-E with Block model 10 mE x 10 mN x 10 mRL and composite for silver.	229
Figure 14-31: Swath Plots comparing native data versus estimated data. Estimates for gold in the mineralized domain 212.	230
Figure 14-32: Vertical cross section 720300- E showing the wireframe used to categorize the block model.	231
Figure 14-33: 3D view showing the wireframe used to categorize the block model.	232
Figure 14-34: Cut-off sensitivity analysis for Measured & Indicated category, silver grade.	238
Figure 14-35: Cut-off sensitivity analysis for Measured & Indicated category, gold grade.	238
Figure 15-01: gold price performance over the last five years.	243
Figure 15-02: silver price performance over the last five years.	243
Figure 15-03: Three-dimensional overview of the Mineral Resource block model.	246
Figure 15-04: Starting topography of the project.	247
Figure 15-05: Geotechnical domains.	249
Figure 15-06: Schematic open pit design parameters.	250
Figure 15-07: Pit by pit optimization.	258
Figure 15-08: Solid of the Reserve Optimal pit shell used for reporting estimates of Measured and Indicated Mineral Resources.	259
Figure 15-09: Optimal reserve pit shell (RF = 1.0). Section AA'.	260
Figure 15-10: Optimal reserve pit shell (RF = 1.0). Section BB'.	261
Figure 15-11: Optimal reserve pit shell (RF = 1.0). Section CC'.	262
Figure 15-12: Typical haul road cross-section.	264
Figure 15-13: Diablillos Project Ultimate pit design.	265
Figure 15-14: Theoretical Phases.	269
Figure 15-15: Theoretical Phases, vertical section AA'.	270
Figure 15-16: Theoretical Phases, vertical section BB'.	271
Figure 15-17: Theoretical Phases, vertical section CC'.	272
Figure 16-01: Typical haul road cross-section.	277
Figure 16-02: Typical haul road turning radius.	277
Figure 16-03: Final pit design.	279
Figure 16-04: Oculito zone, final pit design.	280
Figure 16-04: Oculito zone, final pit design.	282

Figure 16-05: Mining rate per phase.	283
Figure 16-06: Platforms for facilities, infrastructure, and roads.....	285
Figure 16-07: Phase 0 full cover.	286
Figure 16-08: Material moved per period.	287
Figure 16-09: Material mined per year.	288
Figure 16-10: Mine to process plant vs stockpile to process plant.	288
Figure 16-11: Phase 0, final pit design.	291
Figure 16-12: Phase 1, final pit design.	292
Figure 16-13: Phase 2, final pit design.	293
Figure 16-14: Phase 3, final pit design.	294
Figure 16-15: Phase 4, final pit design.	295
Figure 16-16: Phase 5, final pit design.	296
Figure 16-17: Phase 6, final pit design.	297
Figure 16-22: East main dump and haulage ramp from pit.	300
Figure 16-23: North secondary waste dump and haulage ramp from pit.	302
Figure 16-24: ROM pad stocks location.	303
Figure 16-25: Marginal Stockpile location.	304
Figure 16-26: Secondary process stockpile requirement.....	305
Figure 16-27: General mine layout.....	314
Figure 16-28: Location of boreholes (update pending)	316
Figure 16-29: RMR According to depth for METASEDIMENT lithology.	317
Figure 16-30: RMR According to depth for GRANITE lithology.....	317
Figure 16-31: According to depth for Wall Rock-Andesite lithology.....	317
Figure 16-32: UCS at different depths	318
Figure 16-33: Final pit and profiles used for the stability analysis.....	320
Figure 16-34: Stability analysis for profile 2.2 R.	321
Figure 16-35: Stability analysis for profile 2.2 L.	321
Figure 16-36: Stability analysis for profile 6.1 R.	321
Figure 16.37. Diablillos phases.....	322
Figure 16.38. Phase 1 analysis profiles	323
Figure 16-39: Stability analysis for profile 1.1 R.....	324
Figure 16-40: Phase 2 analysis profile.....	324
Figure 16-41: Stability analysis for profile 2.1 R.	325
Figure 16-42: Stability analysis for profile 2.2 R.	326
Figure 16-43: Stability analysis for profile 2.2 L.	326
Figure 16-44: Phase 3 analysis profiles.....	327
Figure 16-45: Stability analysis for profile 3.1 L	328

Figure 16-46: Phase 4 analysis profiles.....	328
Figure 16-47: Stability analysis for profile 4.2 L	329
Figure 16-48: Phase 5 analysis profiles.....	330
Figure 16-49: Stability analysis for 5.2R	330
Figure 16-50: Phase 6 analysis profiles.....	331
Figure 16-51: Stability analysis for 6.1R	332
Figure 16-52: Stability analysis for alternative design 6.3 R.....	333
Figure 16-53: Phreatic level vs open pit level.	344
Figure 17-1: Overall Flowsheet.	347
Figure 17-2: CCD Circuit Flow Streams	353
Figure 18-1: Diablillos Project Site Layout.....	366
Figure 18-3: Regional Site Map - Salta.....	368
Figure 18-2: Regional Site Map - Catamarca	369
Figure 18-3: Mine Access Road	370
Figure 18-4: Piezometer/Well Drill Holes and Test Locations	373
Figure 18-5: General Arrangement Piezometer/Wells Pump Booster Station Plan	373
Figure 18-6: Booster Pump Station and Generator Set Details	374
Figure 18-7: Sewage Treatment Plant.....	376
Figure 18-8: Effluent Treatment Flow Sheet	378
Figure 18-9: East Waste Dump Contact Water Management.	383
Figure 18-10: North Waste Dump Contact Water Management.....	384
Figure 18-13: Tailings Storage General Arrangement	386
Figure 18-14: Enclosing Wall.....	387
Figure 18-15: Geomembrane Anchoring.....	388
Figure 18-16: Leak Control System Details.....	389
Figure 18-17: Location of Infiltrated Water Drains	390
Figure 18-18: Drain Type 1.	391
Figure 18-19: Drain Type 2.	391
Figure 18-20: Leak Collection Pond and Monitoring Box.....	392
Figure 18-22: Cross Section - Perimeter Road and Uncontacted Water Channel	393
Figure 18-26: Schematic Image of Water Pipeline (TSF to Reclaim Pond).....	394
Figure 18-27: Location of Raft and Water Recover Pipe	395
Figure 18-28: Location of Water Storage and Water Pumps.....	396
Figure 18-43: Core Storage Building and Racks for Approx. 30,000 m of Cores.....	397
Figure 18-30: Truck-Shop Typical Lay-Out.....	399
Figure 18-32: Camp Facilities	400
Figure 18-33: Typical Supervisor's Dormitories Lay-Out.....	401

Figure 18-34: Typical Operations and Workers Dormitories	402
Figure 18-35: Typically Lay-Out of Kitchen, Canteen & Recreational Facility	403
Figure 18-36: Typically Lay-Out of Emergency Medical Station	404
Figure 18-37: Typically Lay-Out of Laundry	405
Figure 18-37: Typically Lay-Out of Administrative Offices	406
Figure 18-38: Typically Lay-Out of Access Control, Hospitality Reception and Site Induction.....	407
Figure 18-39: Typical Lay-Out of Work Front Offices for Mine and Process Plant Staff	407
Figure 18-40: Typical Lay-Out of the Chemical & Metallurgical Laboratory	408
Figure 18-41: Typical Lay-Out of Plant Access Control and Change and Locker Rooms.....	409
Figure 18-42 : Explosive Magazines Plot Plan.....	410
Figure 18-46: Typical Lay-Out of a Concrete Grease Separation Chamber.....	412
Figure 18-47: Typical Lay-Out of a Gas Distribution Network	413
Figure 19-1: Silver Prices per Troy Ounce 2004 - 2024	415
Figure 19-2: Gold Prices per Troy Ounce 2004 - 2024	415
Figure 20-1: Platform DDH-20-008 Cleaned and Rehabilitated.....	423
Figure 20-1: Platform DDH-20-008 Cleaned and Rehabilitated.....	424
Figure 20-3: Property Concessions.....	429
Figure 20-4: Diablillos Project Topography	430
Figure 20-5: Project's Direct Area of Influence	431
Figure 20-6: Map of Points of Vegetation	439
Figure 21-1: Staff and workers histogram – Construction Phase.....	465
Figure 22-4: LOM Equivalent Silver Production	486
Figure 22-4: Post-Tax Project Economics	486
Figure 22-5: Pre-Tax Sensitivity Analysis Results	491
Figure 22-4: Post-Tax Sensitivity Analysis Results.....	491
Figure 23-1: metallic & non-metallic projects.	497
Figure 24-1: Preliminary Project Execution Schedule.....	500
Figure 24-2: Risk Matrix Excerpt	501

TABLES INDEX

Table 1-1: Gravity Recovery and Gravity Tails Leach Recovery for Different mineralized zones.	12
Table 1-2: Diablillos Mineral Resource Estimate – As of January 10th, 2024.	14
Table 1-3: Mineral Reserve Estimate - Diablillos Project, Salta, Argentina. By category, all domains - As of March 7 th , 2024.	15
Table 1-4: Existing Servitudes	20
Table 1-5: Summary of Capital Costs by WBS.....	23
Table 1-6: Summary of Operational Costs by WBS.....	24
Table 1-7: Summary of financial parameters used in the PFS-Financial Model.	24
Table 1-8: Post-Tax NPV5 Sensitivity Analysis Results summary.....	26
Table 1-9: Economic Analysis Summary.....	27
Table 1-10: Recommended Tasks Budget Summary	30
Table 2-1 - Report Responsibility Table.	58
Table 4-1: Mineral Tenure.....	63
Table 6-1: Exploration and Development work conducted. AbraSilver Resource Corp, 2023.	77
Table 10-1: Summary of drilling campaign by year, AbraSilver Resource Corp. – Diablillos Project ..	109
Table 11-1: Certified reference materials (CRM).	123
Table 11-2: Summary of AbraSilver QA/QC Counting.....	124
Table 11-3: Certified reference materials.	129
Table 11-4: Summary of AbraSilver QA/QC counting.....	130
Table 11-4: Internal Reference Materials.....	138
Table 11-5: Certified reference materials.	138
Table 11-6: Summary of AbraSilver QA/QC counting.....	138
Table 12-1: Drill campaign summary by year.	153
Table 12-2: Number of records per logging table.	154
Table 12-3: Summary of collars > 2m above or below topography	155
Table 13-1: Sample Preparation Summary.....	163
Table 13-2: JAC Sample Preparation Summary.....	164
Table 13-3: Fantasma Sample Preparation Summary	164
Table 13-4: Comminution Test Result Summary.....	168
Table 13-5: Comminution Test Result Summary – JAC.....	168
Table 13-6: E-GRG Test Au Results Summary for Oculito Material.....	169
Table 13-7: E-GRG Test Ag Results Summary	169
Table 13-8: E-GRG Test Results Summary for JAC Composite.....	170
Table 13-9: Oculito Variability Samples Cyanidation Test Result Summary	171
Table 13-10: JAC & Fantasma Variability Samples Cyanidation Test Result Summary.....	172

Table 13-11: Merrill Crowe Test Result Summary – Oculito Material.....	174
Table 13-12: Merrill Crowe Test Result Summary – JAC Material	175
Table 13-13: Head Assays and Sulphur Specification of Four Oculito Zones	177
Table 13-13: Toxicity Characteristics Leaching Procedure Summary #1 – Oculito	180
Table 13-17: Toxicity Characteristics Leaching Procedure Summary #2 – Oculito	181
Table 13-14: Toxicity Characteristics Leaching Procedure Summary #3 – Oculito	182
Table 13-15: Toxicity Characteristics Leaching Procedure Summary #1 - JAC	183
Table 13-20: Toxicity Characteristics Leaching Procedure Summary #2 - JAC	184
Table 14-1: Mineral Resource Estimate for the Diablillos Project by mineral zone and category - As of November 22 th , 2024.	191
Table 14-2: Summary of a subset of the Drill Holes used in the Mineral Resource estimate.....	192
Table 14-3: Drill Holes summary excluded of the resource estimate.....	193
Table 14-4: Estimation domains and coding used.....	197
Table 14-5: Gold Grade statistics by Lithological and Alteration combination.	199
Table 14-6: Silver Grade statistics by Lithological and Alteration combination.	200
Table 14-7: Sampling percentage summary by domain.....	201
Table 14-8: Summary statistics, global population for non-composite and composite data. Oculito and Laderas zones.....	202
Table 14-9: Summary statistics, global population for non-composite and composite data. JAC zone.	202
Table 14-10: Summary statistics, global population for non-composite and composite data. Fantasma zone.....	202
Table 14-11: Summary statistics for each gold domain of composite - Au g/t	206
Table 14-12: Summary statistics for each silver domain of composite - Ag g/t.....	206
Table 14-13: Top cut statistics by gold domain – Au g/t composite data.....	207
Table 14-14: Top cut statistics by silver domain – Ag g/t composite data.....	208
Table 14-15: In-situ bulk density applied into the block model.....	212
Table 14-16: Variogram models used for gold domains – Summary.	213
Table 14-17: Variogram models used for silver domains – Summary.....	214
Table 14-18: Block model parameters.....	223
Table 14-19: Gold domains search parameters.	224
Table 14-20: Silver domains search parameters.....	225
Table 14-21: Diablillos Project Mineral Resource Estimate, by mineral zone and classification - As of November 22 th , 2023.	235
Table 14-22: Optimization Parameters.....	236
Table 14-23: NVB and cut-off grade sensitivity of Measured & Indicated Mineral Resources	237
Table 14-24: Difference between previous Mineral Resources estimate 2022 and current Mineral Resource estimate.....	240

Table 15-01: Block model parameters.....	244
Table 15-02: Block model fields.	245
Table 15-03: Overall slope angle by geotechnical domain.....	248
Table 15-04: Open Pit Design Parameters.....	250
Table 15-05: Economic parameters for open pit optimization.....	251
Table 15-06: Incremental mine cost by elevation.....	252
Table 15-07: Gold (Au) and Silver (Ag) Recovery.	253
Table 15-08: Blocks classified and costed as waste rock.	254
Table 15-09: Optimization variable definition (OREW).....	256
Table 15-10: Open pit optimization results.....	256
Table 15-11: Measured and Indicated Mineral Resources contained in optimal open pit shell.....	258
Table 15-12: Two-way haul road design parameters.	263
Table 15-13: Nested pit tonnage capacity estimates at planning prices.	266
Table 15-14: tonnage capacity estimate of theoretical phases.....	268
Table 15-15: Mineral Reserve Estimate Statement for the Diablillos Project, Salta, Argentina. By category, all domains. - As of February 27 th , 2024.	274
Table 16-01: Pit design parameters.....	278
Table 16-02: Proven and Probable Mineral Reserves by operating phase.	281
Table 16-03: Waste rock by phase.	283
Table 16-04: movement by period.	289
Table 16-05: Mine movement by period.....	290
Table 16-06: Mine movement by period.....	298
Table 16-07: Marginal Stock balance - Below Cut-off grade movement by period.....	304
Table 16-08: fleet estimation inputs.....	306
Table 16-09: CAT992G loading equipment assumptions.	307
Table 16-10: Mine trucks requirements.....	308
Table 16-11: drilling parameters.	309
Table 16-12: production drilling equipment requirements.....	310
Table 16-13: contouring drilling equipment requirements.....	310
Table 16-14: Pre-Splitting drilling equipment requirements.....	311
Table 16-15: support equipment details.....	312
Table 16-16: required mine staffing.	313
Table 16-17: Geotechnical parameters by lithology.....	319
Table 16-16: Summary Table with Final Pit SF and PF Values	320
Table 16-17: Phase 1 SF and PF.....	323
Table 16-18: Phase 1 SF and PF.....	325
Table 16-19: Phase 3 SF and PF.....	327

Table 16-20: Phase 4 SF and PF.....	329
Table 16.21: Phase 5 SF and PF.....	330
Table 16-22: Phase 6 SF and PF.....	331
Table 16-54: Level of open pit period.....	344
Table 18-2: Piezometer / Well Flow Rates from Testing.....	372
Table 18 3: ST-DBL.Ag07 Max Flow Rate (as a function of dynamic level and piezometer/well design)	372
Table 18-6: Quality of Treated Effluent.....	377
Table 18-8: Estimated Electrical Load Requirement.....	381
Table 18-11: Final TSF Capacity	385
Table 18-12: TSF Dam Details	387
Table 19-1: Sales terms assumptions	414
Table 19-2: Metal Prices for Silver and gold.....	416
Table 20-1: Required Key Permits and Authorizations	420
Table 20-2: Required Key Permits and Authorizations	421
Table 20-3: Existing Easements.....	421
Table 20-3: Chemical Analysis of the Water Underground Well St.DBL.Bg4 (2007)	434
Table 20-4: Chemical Analysis of the Water Underground Well St.DBL.Ag1 and St.DBL.Ag5 (2007) .	436
Table 20-5: Physical Schedule of Social Communication Program Activities	458
Table 20-6: Schedule of Mine Closure Activities.....	461
Table 21-1: Relevant MTO's.....	464
Table 21-2: Major Mine Equipment	465
Table 21-2: Summary of Capital Costs by WBS.....	467
Table 21-3: Summary of Capital Costs by Discipline.....	468
Table 21-4: Summary of Operating Costs.....	474
Table 21-4: Summary of Operating Costs.....	475
Table 21-6 shows the camp and service hub operating costs.	476
Table 21-6 Camp Operating Costs.....	476
Table 21-7:Mine Operating Costs.....	477
Table 21-8: Process Plant Operating Costs.....	478
Table 21-9: Ancillaries, Utilities and Off-site facilities Operating Costs.....	478
Table 21-10: Maintenance Costs.....	479
Table 21-11: Logistics Costs	480
Table 21-12: G&A Costs.....	480
Table 22-1 – Financial model parameters.....	483
Table 22-2 – Royalties and Taxes	485
Table 22-3 – Depreciation Scheme.....	486

Table 22-4: Economic Analysis Summary.....	487
Table 22-5: Cashflow Statement on an Annualized Basis (Real 2024 \$M Unless Otherwise Noted) ..	488
Table 22-6: Pre-Tax Sensitivity Analysis (USD).....	490
Table 22-7: After-Tax Sensitivity Analysis (USD)	490
Table 26-1: Proposed Budget Summary.....	508

2 INTRODUCTION

This report was prepared as a National Instrument 43-101 Technical Report for AbraSilver Resources Corporation (“AbraSilver”) by a team of consultants contracted by AbraSilver (“the Team”) to complete a pre-feasibility study (PFS) of the Diablillos Project in conjunction with AbraSilver’s geological, mining, process, and environmental consultants. The PFS was prepared in accordance with the Canadian disclosure requirements of National Instrument 43-101 (NI 43-101) and in accordance with the requirements of Form 43-101 F1.

2.1 Purpose of Report

The purpose of this report is to publish a technical report on the Pre-Feasibility Study (“PFS”) of the Diablillos Property summarizing:

- The land tenures, exploration history, and drilling.
- The mineral resource estimates are for Oculito, Laderas, Fantasma and JAC deposits.
- The mineral reserve estimates are for Oculito and JAC.
- A conceptual mine plan at a level to support a PFS.
- Recovery methods and process design at a level to support a PFS.
- The supporting infrastructure including power, buildings, tailings management facility, process plant, etc. to support the conceptual mine plan.
- The environmental permitting requirements for the Project.
- Capital and operating expenditure estimates for the Project.
- An economic analysis of the Project.
- Provide recommendations and budget for additional work.

2.2 Terms of Reference

AbraSilver engaged the services of the authors to write an independent NI 43-101 technical report on the Diablillos Property in the Puna region of Argentina. This report was prepared following NI 43-101 guidelines, Forms NI 43-101F1, and Companion Policy 43 101CP.

2.3 AbraSilver Resource Corp

AbraSilver’s corporate offices is located in 220 Bay St., Suite 550, Toronto, ON M5J 2W4, and the Company is listed on the (TSX.V:ABTA; OTCQX: ABBRF). “AbraSilver” or the “Company” is an advanced-stage exploration company focused on rapidly advancing its 100%-owned Diablillos silver-gold project in the mining-friendly Salta province of Argentina.

2.4 Qualification of Consultant

The Consultants preparing this technical report are specialists in the fields of geology, exploration, mineral resource estimation, open pit mining, geotechnical, environmental, permitting, metallurgical testing, mineral processing, processing design, civil, mechanical, electrical, capital, and operating cost estimation, and mineral economics.

None of the Consultants or associates employed in the preparation of this report has any beneficial interest in AbraSilver. The Consultants are not insiders, associates, or affiliates of AbraSilver. The results of this technical report are not dependent upon any prior agreements concerning the conclusions to be reached, nor are there any undisclosed understandings concerning any future business dealings between AbraSilver and the Consultants. The Consultants are being paid a fee for their work in accordance with normal professional consulting practice.

2.5 Report Responsibility and Qualified Persons

The following individuals, by virtue of their education, experience, and professional association, are considered Qualified Persons (“QPs”) as defined in the NI 43-101 standard, for this report, and are members in good standing of appropriate professional institutions:

- Luis Rodrigo Peralta, Senior Resource Geologist, B. Sc., FAusIMM CP (Geo).
- Miguel Fuentealba Vergara, Senior Mining Engineer, MAusIMM.
- Joseph Keane, P.E., Independent Mineral Processing Engineer Consultant.
- William Van Breugel P. Eng., Principal Mining Consultant.
- Johnny Canosa, P.Eng., Senior Engineer, Mining.

The preceding QPs have contributed to the writing of this report and have provided QP certificates. The information contained in the certificates outlines the sections in this report for which each QP is responsible. Each QP has also contributed figures, tables, and portions of Sections 1 (Summary), 2, (Introduction), 3 (Reliance on other Experts), 25 (Interpretation and Conclusions), 26 (Recommendations), and 27 (References). Table 2-1 outlines the responsibilities for the various sections of the report and the name of the corresponding Qualified Person.

Table 2-1 - Report Responsibility Table.

Items	Description	Qualified Person	Company
Item 1	Summary	All QP's	All QP's
Item 2	Introduction	Luis Rodrigo Peralta	INSA
Item 3	Reliance on Other Experts	Luis Rodrigo Peralta	INSA
Item 4	Property Description and Location	Luis Rodrigo Peralta	INSA
Item 5	Accessibility, Climate, Local Resources, Infrastructure and Physiography	Luis Rodrigo Peralta	INSA
Item 6	History	Luis Rodrigo Peralta	INSA
Item 7	Geological Setting and Mineralization	Luis Rodrigo Peralta	INSA
Item 8	Deposit Types	Luis Rodrigo Peralta	INSA
Item 9	Exploration	Luis Rodrigo Peralta	INSA
Item 10	Drilling	Luis Rodrigo Peralta	INSA
Item 11	Sample Preparation, Analyses and Security	Luis Rodrigo Peralta	INSA
Item 12	Data Verification	Luis Rodrigo Peralta	INSA
Item 13	Mineral Processing and Metallurgical Testing	Joseph M. Keane	SGS
Item 14	Mineral Resource Estimates	Luis Rodrigo Peralta	INSA
Item 15	Mineral Reserve Estimates	Miguel Fuentealba Vergara	BMining
Item 16	Mining Methods	Miguel Fuentealba Vergara	BMining
Item 17	Recovery Methods	Joseph M. Keane	SGS
Item 18	Project Infrastructure	Johnny Canosa	SGS
Item 19	Market Studies and Contracts	William van Breugel	SGS
Item 20	Environmental Studies, Permitting and Social or Community Impact	Johnny Canosa	SGS
Item 21	Capital and Operating Costs	William van Breugel	SGS
Item 22	Economic Analysis	William van Breugel	SGS
Item 23	Adjacent Properties	Luis Rodrigo Peralta	INSA
Item 24	Other Relevant Data and Information	Luis Rodrigo Peralta	INSA
Item 25	Interpretation and Conclusions	All QP's	All QP's
Item 26	Recommendations	All QP's	All QP's
Item 27	References	All QP's	All QP's

2.6 Site Visits

The following bulleted list describes the Qualified Persons who visited the Property, the date of the visit, and the general objective of the visit:

- Luis Rodrigo Peralta, Senior Geologist, B. Sc., AbraSilver Independent Consultant visited the site from April 24th to May 3rd and from October 2nd to October 8th, 2023, for the purposes of this report.
- Joseph Keane, P.E., an Independent Mineral Processing Engineer Consultant, SGS, visited the site from September 13th to September 15th, 2022, for the purposes of this report.

- Miguel Fuentealba Vergara, BME, MAusIMM CP, BMining Chile, visited the site from October 2nd to October 8th, 2023, for the purposes of this report.
- Johnny Canosa and William van Breugel did not visit the project, as they relied on their SGS colleague Joseph Keane, who performed the site visit on their behalf.

2.7 Currency, Units of Measure, and Calculations

Unless otherwise specified or noted, the units used in this report are metric. Every effort has been made to clearly display the appropriate units being used throughout the report.

Currency is in US dollars (USD or \$), unless otherwise noted.

This report includes technical information that required subsequent calculations to derive subtotals, totals, and weighted averages. Such calculations inherently involve a degree of rounding and consequently introduce a margin of error. Where these occur, the QPs consider them immaterial.

2.8 Effective Date

The issue date of this report is April 30th, 2024. The effective date of the Diablillos Silver-Gold Project Fully Integrated PFS is March 7th, 2024.

As of the effective date of this report, the authors are not aware of any material fact or material change with respect to the subject matter of this technical report that is not presented herein, or which the omission to disclose could make this report misleading.

3 RELIANCE ON OTHER EXPERTS

The QPs (Qualified Persons) William Van Breugel, Johnny Canosa and Luis Rodrigo Peralta have reviewed and analysed data and reports provided by AbraSilver, together with publicly available data, drawing their own conclusions.

The QP who prepared this section of the report relied on information provided by experts who are not QPs. The QP believes that it is reasonable to rely on these experts, based on the assumption that the experts have the necessary education, professional designations, and relevant experience on matters relevant to the technical report.

- Mr. William Van Breugel and Johnny Canosa relied upon Knight Piésold for matters pertaining to the design, capital, and operating expenditures of the AbraSilver Project tailings dam and facility as disclosed in Section 18.7.
- Mr. William van Breugel relied upon data collected, summarized, and presented by AbraSilver for the areas of capital costs, operating costs, and financial modelling. A thorough audit of this data was conducted by Mr. van Breugel.
- Mr. Johnny Canosa has also relied upon information provided by Pacific Rim Mining Corporation Argentina S.A., a wholly owned local subsidiary of Abrasilver and its Environmental Consultants Elisa Cozzi & Asociados for the Environmental Report as disclosed in Section 20.
- Mr. Luis Rodrigo Peralta has relied on land tenure information provided by AbraSilver. This includes two letters of legal opinion regarding the validity of the tenure from the legal firm, Perez Alsina Consultores Mineros, of Buenos Aires (Perez Alsina, December 7th, 2023) and Estudio Jurídico Ponferrada & Vila Melo, of San Fernando del Valle de Catamarca (Ponferrada & Vila Melo, December 12th, 2023).
- Mr. Joseph Keane has relied on the Abrasilver internal report – Diablillos Site Kinetic Humidity Cells test – 2023.

The QPs have assumed, and relied on the fact, that all the information and existing technical documents listed in References Section 27 of this report are accurate and complete in all material aspects. While the QPs reviewed all the available information presented, they cannot guarantee its accuracy and completeness. The QPs reserve the right, but will not be obligated, to revise the report and conclusions, if additional information becomes known after the date of this report.

Except for the purposes legislated under provincial securities laws, any use of this report by any third party is at that party's sole risk.

4 PROPERTY, DESCRIPTION AND LOCATION

The Diablillos property is located in the high Puna and Altiplano region of north-western Argentina (Figure 4 1). It is approximately 160 km southwest of the city of Salta and 375 km northwest of the city of Catamarca, along the border between the Provinces of Salta and Catamarca, Argentina (Figure 4 2). The property encompasses an area of 11,403 ha (28,177 acres). The geographic coordinates at the centre of the property are 25°18' South latitude and 66°50' West longitude.

4.1 Land tenure.

Mr. Peralta has relied on land tenure information provided by AbraSilver. This includes two letters of legal opinion regarding the validity of the tenure from the legal firm, Perez Alsina Consultores Mineros, of Buenos Aires (Perez Alsina, December 7th, 2023) and Estudio Juridico Ponferrada & Vila Melo, of San Fernando del Valle de Catamarca (Ponferrada & Vila Melo, December 12th, 2023).

Despite AbraSilver's understanding that its title to the Diablillos concessions in Salta should ultimately prevail, in 2017 AbraSilver acquired and effectively consolidated ownership and control of any and all overlapping, and potentially conflicting mineral rights granted by the Mining Judge of Catamarca on the same area of the Diablillos properties. With this acquisition AbraSilver eliminated any potential title risk, particularly if the provincial border dispute remains unresolved or the disputed area is being granted in the future to Catamarca, since it currently holds title to all mining concessions and rights from both provinces.

The mining concessions (called "concesiones mineras" in the Argentine Mining Code) consist of 15 contiguous and overlapping mineral claims, some of them registered as a mining block "Grupo Minero Diablillos" through a different file number that includes several rights of ways and water easements. Additionally, the company has added 2 mining claims for logistics purposes that are approximately 70 km to the northwest of the main block and has recently registered 5 new claims near the main block, but not contiguous, as listed in Table 4 1 and shown in Figure 4 2. The Project lies within an area disputed by the Provinces of Salta and Catamarca, however mining concessions covering the Project have been granted by both provinces in this area of dispute. The concessions were first granted by the Mining Judge of Salta but were subsequently overlapped by concessions applied for and later granted by Catamarca province. In a 1985 judicial precedent, concerning a similar case but in the Salar de Diablillos neighbouring project, the Supreme Court of Argentina ruled in favour of the prevailing competence of the Mining Judge of Salta, who was first to grant the concessions. Pacific Rim Mining Corporation Argentina S.A., current subsidiary of AbraSilver, applied for the Diablillos concessions in 1994 in the Province of Salta, prior to concessions granted by the Mining Judge of Catamarca, claimed in 2004 in said province for properties overlapping the Diablillos concessions. The Argentine Mining Code establishes that the first claim applying for a concession to be registered has precedence over subsequent claims. This precedence is consistent with the ruling of the Supreme Court of Argentina and, hence, it has proven to be

a valid argument that may be used in a potential lawsuit to decide the applicable competence of the Salta and Catamarca provinces involved in the border dispute.

It is worth mentioning that the Diablillos project has always been subject to the competence of Salta authorities for all main permits, controls and compliance under the Argentine Mining Code and provincial regulations. There is a common understanding between Salta and Catamarca provinces with few interferences with the project by Catamarca authorities. Salta competence over Diablillos has not been judicially disputed by Catamarca since the aforementioned ruling by the Supreme Court of Argentina in 1985.

However, the Governments of Salta and Catamarca are fully aware of the need to resolve competence issues and grant legal certainty for mining investors in the disputed area. Accordingly, due to the construction announcement made by POSCO ARGENTINA S.A.U. regarding its lithium project “Sal de Oro”, both Governments reached at an agreement this year to facilitate, and foster said project, which is partially lying within the border dispute area and neighbouring to the Diablillos project. According to this agreement, the Provinces of Salta and Catamarca will share royalties and taxes in equal portions. The mining, environmental and policing of the project will be managed by an Interprovincial Authority integrated by officers of both provinces. This agreement, although still subject to the approval of the provincial Congresses of Salta and Catamarca, is a good precedent for Diablillos. It is a mechanism to deal with these issues until the border conflict is finally resolved by the National Congress.

Table 4-1 lists the concessions granted by both Salta and Catamarca. Due to the overlapping of the claim groups, the areas could be misleading. Figure 4-3 shows the Salta concessions while Figure 4-4 shows the Catamarca concessions. The overall property area depicted in Figure 4-5 is approximately 11,403 ha.

Table 4-1: Mineral Tenure

Tenement ID		Type	Area (ha)	Date of Grant	Expiry Date	
File N°	Name					
Diablillos - Catamarca Province						
629/P/2009	Condor Yacu Este	Exploitation Concession	1880.14	12-03-10	N/A (2, 3)	
408/M/2003	Cerro Bayo	Exploitation Concession	1500.00	10-06-04	N/A (2, 3)	
550/M/2004	Cerro Bayo I	Exploitation Concession	1500.00	30-11-04	N/A (2, 3)	
220/A/2007	Dorotea	Exploitation Concession	718.07	27-02-08	N/A (2, 3)	
139/A/2013	Dorotea I	Exploitation Concession	2673.52	17-05-16	N/A (2, 3)	
Diablillos - Salta Province						
"Grupo Minero Diablillos" File 18,691 (1)	11749	Los Corderos	Exploitation Concession	598.65	13-02-84	N/A (2, 3)
	11750	Pedernales	Exploitation Concession	599.00	14-04-86	N/A (2, 3)
	11751	Renacuajo	Exploitation Concession	600.80	15-02-84	N/A (2, 3)
	11964	Relincho I	Exploitation Concession	624.66	29-04-85	N/A (2, 3)
	11965	Relincho II	Exploitation Concession	430.70	29-04-85	N/A (2, 3)
	11966	Relincho III	Exploitation Concession	668.10	29-04-85	N/A (2, 3)
	16031	Alpaca I	Exploitation Concession	300.00	03-07-98	N/A (2, 3)
	14840	Fantasma (1)	Exploitation Concession	598.42	14-10-94	N/A (2, 3)
	19541	Alpaca (1)	Exploitation Concession	3498.86	15-04-10	N/A (2, 3)
	21384	La Carito	Exploitation Concession	142.59	N/A (7)	N/A (2, 3)
	745705	Alpaca III	Exploitation Concession	3149.54	N/A (5)	N/A (2, 3)
	745714	Alpaca VI	Exploitation Concession	3227.75	N/A (5)	N/A (2, 3)
	745720	Alpaca VII	Exploitation Concession	3426.75	N/A (5)	N/A (2, 3)
Easements						
16225	Road and camp easement	Easement	25.00	N/A	N/A	
18927	Road easement	Easement	36.00	N/A	N/A	
19332	Water easement	Easement	1.00	N/A	N/A	
19333	Water easement	Easement	1.00	N/A	N/A	
19334	Water easement	Easement	6.00	N/A	N/A	
752594	Water easement	Easement	4.00	N/A	N/A	
752595	Water easement	Easement	4.00	N/A	N/A	

Notes:

- ⁽¹⁾ Mortgaged in favour of Silver Standard Resources INC. Registered on 11/6/18. For USD 15,050,000. Expiration: 08/08/37
- ⁽²⁾ The Mining Concession does not expire, as long as the concessionaire fulfils all maintenance conditions under the regulations.
- ⁽³⁾ All Mining Concessions and Discovery Claims are in force.
- ⁽⁴⁾ Acquired recently. Awaiting formal registration in the name of Pacific.
- ⁽⁵⁾ Requested as new Discovery Claims recently. Awaiting formal concession to Pacific.
- ⁽⁶⁾ Pocitos properties are located approx. 70km to the north-northwest of Diablillos and were added for logistics purposes only.
- ⁽⁷⁾ Vacant mine requested by Pacific and awaiting formal concession.
- ⁽⁸⁾ Next canon due on December 31, 2023, for 1st semester 2023.

On November 1st, 2016, AbraSilver Resource Corp. ("AbraSilver"), formerly AbraPlata Resource Corp. ("AbraPlata") and Angel BioVentures Inc. originally acquired the mining concessions granted by the Government of Salta through an agreement with SSRM Mining ("SSRM") and Pacific Rim Mining Corporation Argentina S.A. an Argentinian company and the registered owner of the Diablillos property. Under this agreement, AbraSilver acquired, through the merger with Huayra Minerals Corporation, certain subsidiaries of SSRM, including Pacific Rim Mining Corporation Argentina S.A. As consideration for the payment concessions, SSRM received USD 6.35 million in cash payments and 24.15 million in AbraSilver common shares comprising 17.65% of the issued and outstanding common shares at that time.

To fulfil the terms of the agreement, AbraPlata is required to make a cash payment of USD 7 million on construction start-up or at the fifth anniversary. (July 31st, 2025).

In addition to these payments, SSRM is entitled to receive 1.0% net smelter return ("NSR") royalty on production from the project.

As of September 6th, 2017, AbraSilver completed the definitive documentation necessary to acquire a 100% equity interest in Minera Cerro Bayo SA ("Cerro Bayo"), the owner of the conflicting mineral rights granted by the government of Catamarca, thereby indirectly acquiring ownership and control of the conflicting mineral interests. As consideration, AbraSilver will pay US\$3.325 million in cash (USD 0.96 million paid) and issue 500,000 (Issued) common shares of the company to the shareholders of Cerro Bayo in instalments over a five-year period. On September 11, 2019, AbraPlata and Aethon Minerals Corporation ("Aethon") entered into a binding agreement whereby AbraPlata acquired all the issued and outstanding shares of Aethon. The transaction value was approximately \$10.9 million on a fully diluted in-the-money basis, and Aethon and AbraPlata shareholders received approximately 46% and 54% of the combined entity, respectively.

SSRM, the original vendor of the Diablillos property to AbraPlata, supported the Transaction and, agreed to defer the Diablillos property payment of USD 7 million on one of the earlier dates:

- Commercial Production starts in any of all parts of the Diablillos Concessions.
- Or July 31st, 2025.

On March 4th, 2021, AbraPlata formerly changed its name to AbraSilver Resource Corp.

On July 29, 2021 SSRM announced that it had sold their royalty portfolio to EMX Royalties. This transaction includes the 1% NSR on Diablillos project as well as the remaining USD 7 Million payment which is due in 2025 (or upon commercial production).

Argentinian Mining Concessions are granted in perpetuity, under certain conditions, which must be met by the property holder. Among these conditions is the requirement for an annual canon payment to the province, to be paid in two instalments due on June 30 and December 31 of each year. AbraSilver reports that the total annual amount of the canon is approximately

US\$4,800. A letter of legal opinion stated that the canon had been fully paid for 2023 (Zaballa Carchio, 2021) The next instalment will be due on June 30, 2024.

The surface rights for the concessions are not held by AbraSilver. Under the Argentine Mining Code, a mining concession grants its holder an easement right over the concession area and therefore owners of surface rights cannot prevent the holder of a mining concession from accessing and developing the property. Unless the land is fiscal, the owners are entitled to an indemnity for the easement granted, to cover any disturbance or loss of use of the land due to mining activities. The holder of the concession typically would negotiate an agreement with the surface owner. If they are unable to agree, an appropriate compensation will be determined by the Court. The Diablillos concessions are on fiscal lands owned by the Province of Salta and therefore no compensation is required according to the Argentine Mining Code.

AbraSilver either has or can readily acquire all required permits to conduct any proposed work on the property. The Biannual Update of the Environmental Impact Report, allowing drilling activities and any other exploration activity related was renewed, and lodged with the Provincial Secretary of Mines of Salta on April 27, 2021. On April 04th, 2022 DIA - Declaración de Impacto Ambiental (Environmental Impact Declaration) was granted, allowing the company to perform any exploration activities and a term of 24 months to present the corresponding renewal for the next two years (2024-2025). The next renewal of the Environmental Impact Report was filed on October 24th, 2023, at the same time in Salta and Catamarca provinces.

At the time of writing the report, the author was informed that environmental permits are in good standing to execute any exploration activity.

Mr. Peralta is not aware of any other significant factors or risks that may affect access, title, or the right or ability to perform the proposed work program on the property.



REGIONAL LOCATION

Legend


- Diablillos Project
- Catamarca Province
- Salta Province



0 500 1.000 Km

Map Produced by: Gonzalo Javier Montebelli
Date Produced: 10 of December 2023
Coordinate System: UTM WGS 84. Zone 19S

Figure 4-1: Property location. Source: Abrasilver Resource Corp. 2023.

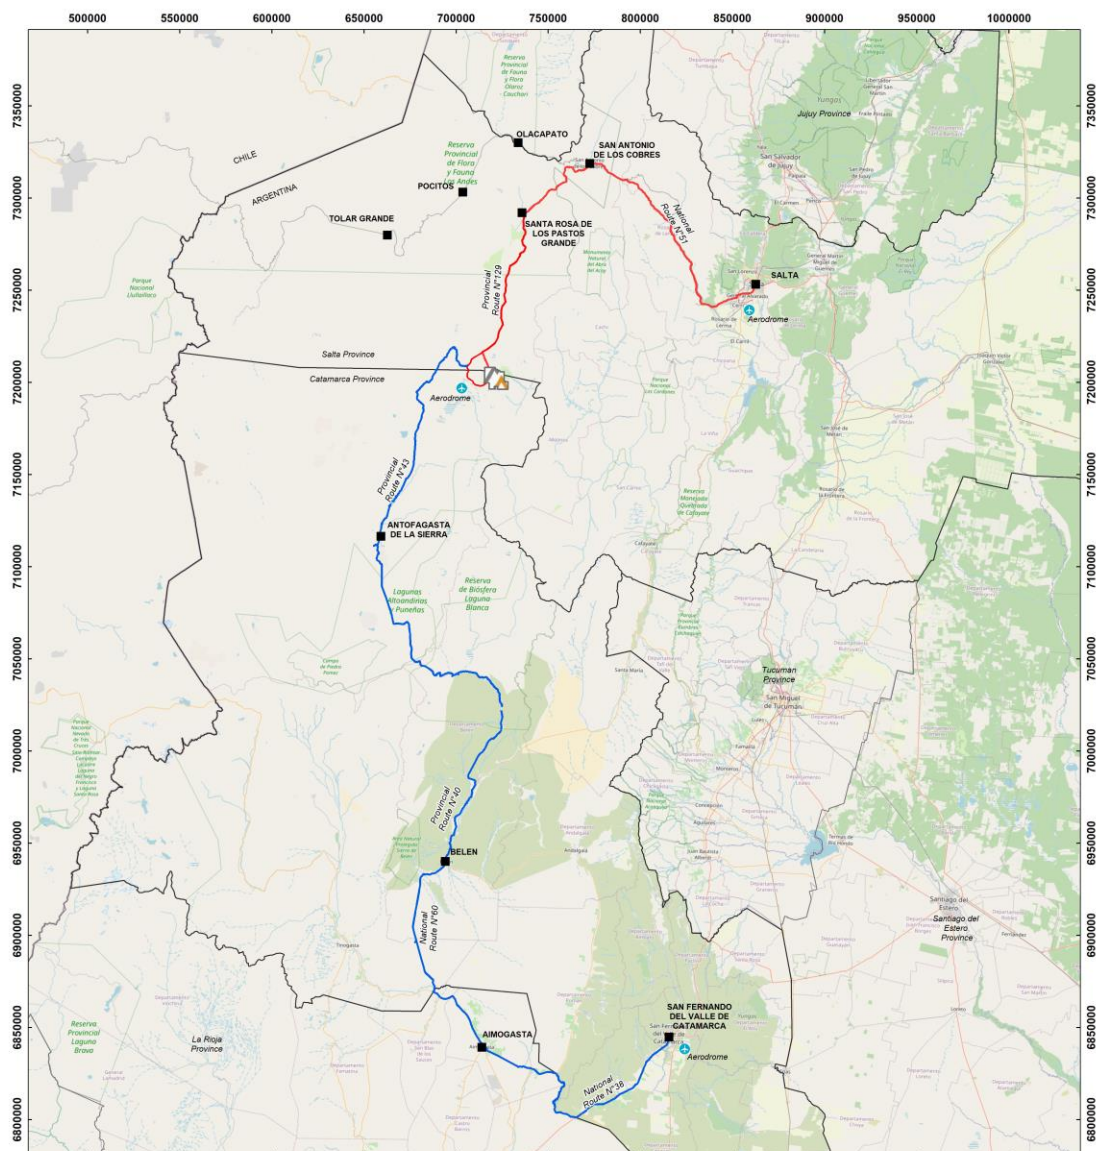

0 50 100 Km
REGIONAL LOCATION

Legend

-  Diablillos Project
-  Catamarca-Diablillos Roads
-  Salta-Diablillos Roads

Map Produced by: Gonzalo Javier Montebelli
Date Produced: 10 of December 2023
Coordinate System: UTM WGS 84. Zone 19S

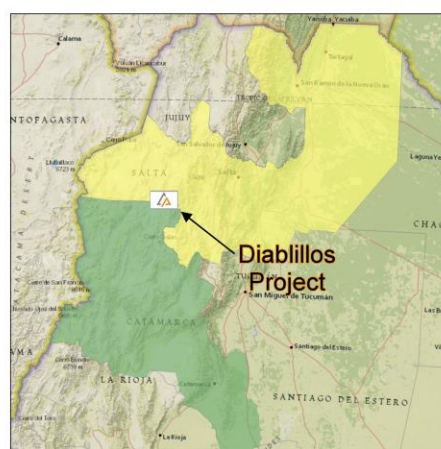


Figure 4-2: Detailed property location. Source: Abrasilver Resource Corp. 2023.

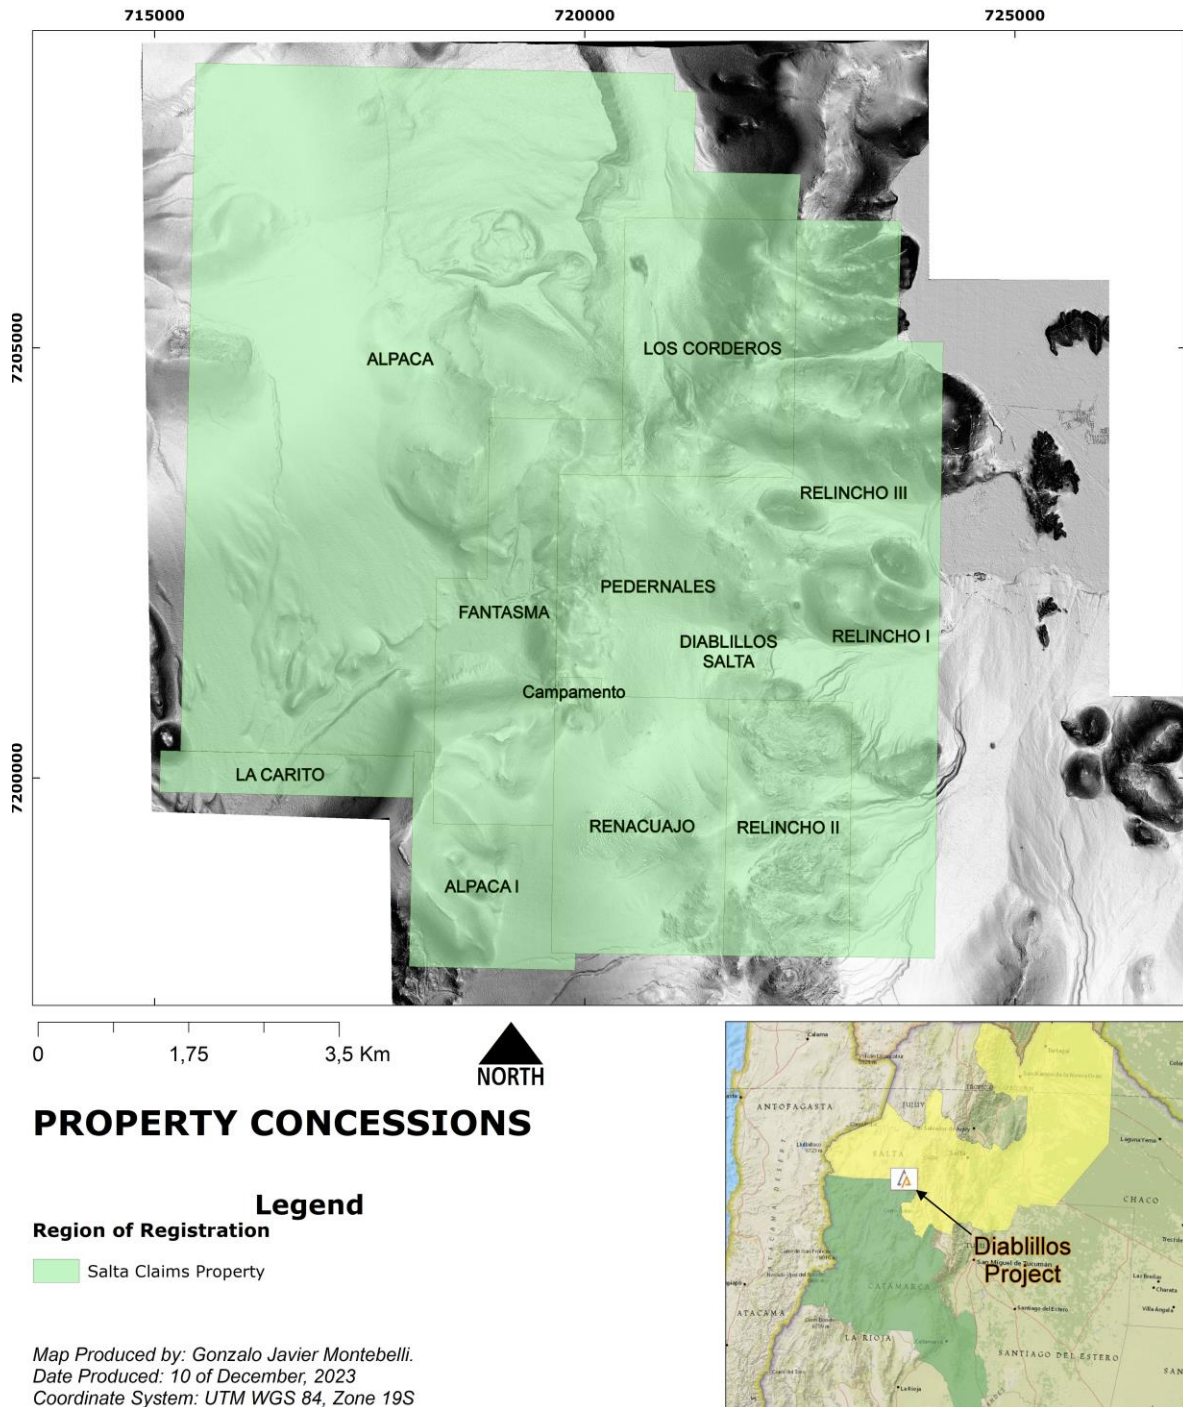


Figure 4-3: Salta Property Claims. Source: AbraSilver Resource Corp. 2023.

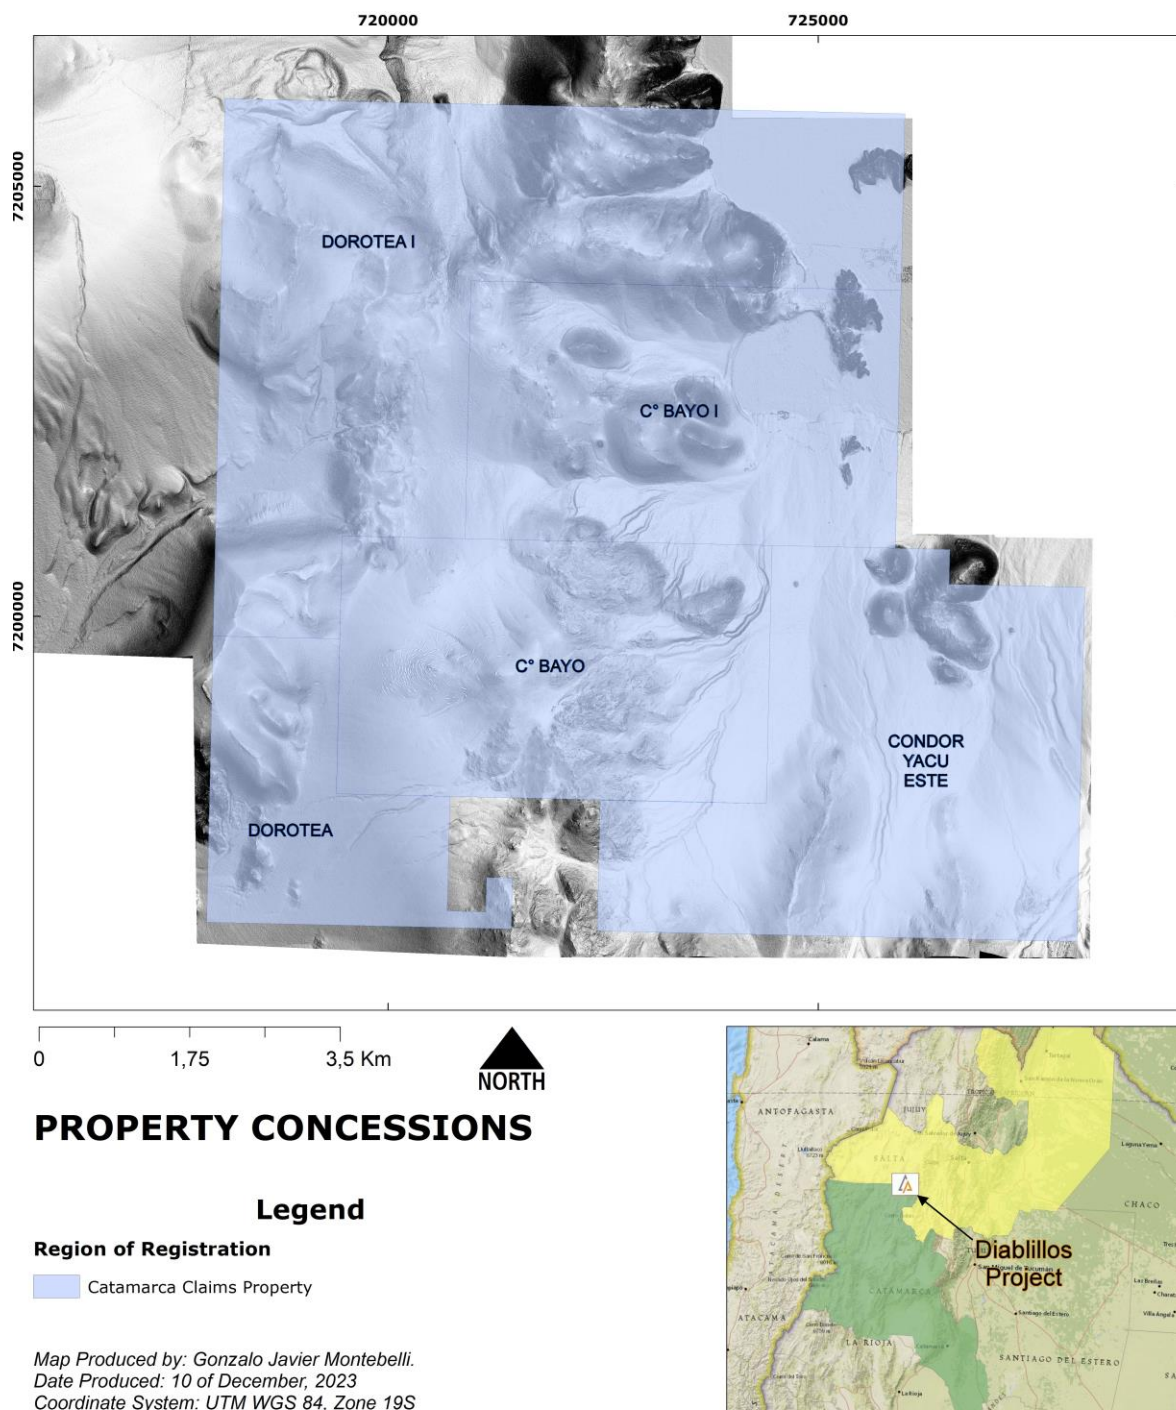


Figure 4-4: Catamarca Property Claims. Source: AbraSilver Resource Corp. 2023.

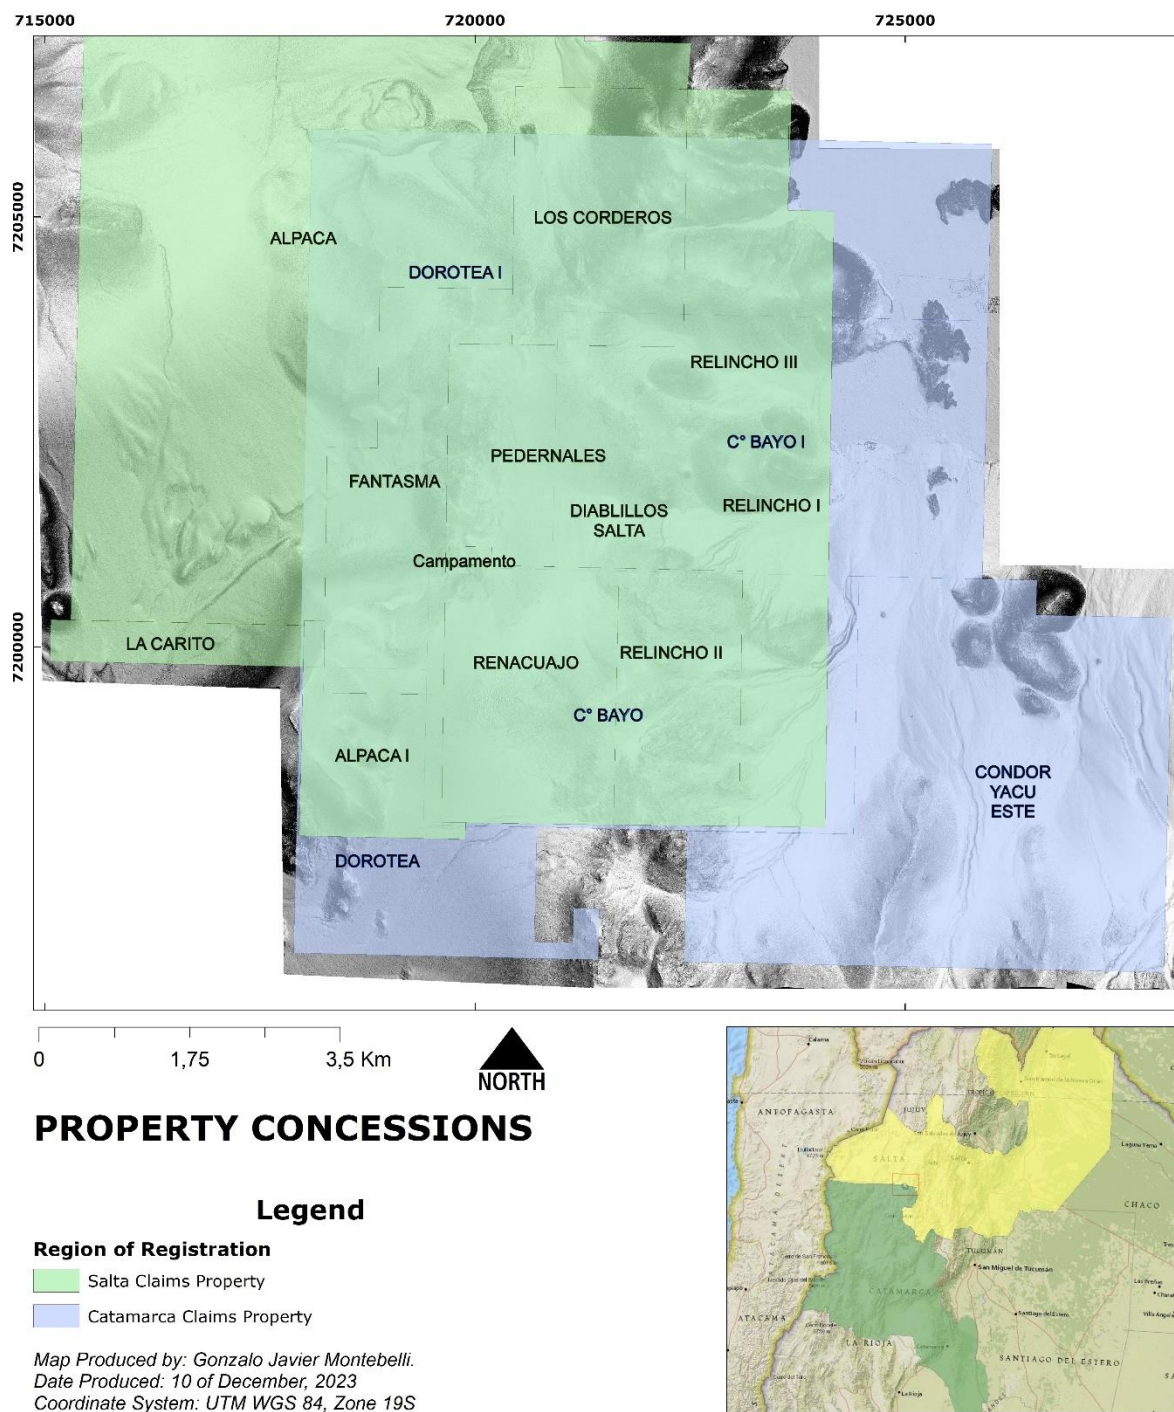


Figure 4-5: Total Property Claims, Salta & Catamarca provinces. Source: AbraSilver Resource Corp. 2023.